

OPTIDRIVE™ CP²

AC Variable Speed Drive

Powerful Performance Advanced motor control



0.75kW–250kW / 1HP–350HP
200–600V Single & 3 Phase Input



Powerful Performance

World leading control for the latest generation of permanent magnet and standard induction motors

Manufacturing Conveyer Systems Processing Plants Chemical
Pumping Machine Tools Plastics Rubber Elevators Cranes



World Leading Motor Control

The Optidrive P2 offers the perfect combination of high performance together with ease of use to allow even the most demanding applications to be tackled easily.

Designed for fast installation and commissioning, Optidrive P2 provides the most cost effective solution for industry.

All Optidrive P2 units provide 150% overload for 60 seconds as standard, ensuring each drive is suitable for Heavy Duty applications, whilst the IP55 enclosed versions ensure the drive is tough enough to survive in industrial environments.

Extensive I/O and communications interface capabilities ensure the drive can be integrated quickly and efficiently into a wide variety of control systems with the minimum commissioning time, ensuring rapid start up. Invertek's simple parameter structure, and carefully selected factory parameter settings ensure that commissioning time is kept to a minimum.



Compliant with international standards.
Manufactured in the UK.

150% overload for
60 seconds



IP20

Up to 250kW



IP55

Up to 160kW



IP66

Up to 11kW



Advanced Motor Control

Optidrive P2 has been uniquely developed to allow a wide range of different motor types to be used, with only parameter changes being required. This technology allows the same drive to be used in a wide range of applications, allowing OEMs and end user alike to take advantage of the energy saving provided by using the latest motor technologies.

AC Induction Motors

The majority of AC motors in use today around the world are standard induction motors. These motors are relatively low cost, readily available and provide good performance with long service life. With the ever increasing focus on energy efficiency, motor manufacturers have refined and improved their designs in recent years.

Optidrive P2 has been developed to provide optimum control and maximum efficiency when operating with older motors designs, or newer high efficiency designs.

Operation can be in simple V/F control mode or in High Performance Third Generation Vector Mode, which provides up to 200% torque from zero speed without requiring an encoder.

Permanent Magnet AC Motors

Permanent magnet AC motors provide improved efficiency compared to standard induction motors. Using permanent magnets in the motor construction eliminates the need for any magnetising current, reducing electrical losses. PM motors have been used for many years in high performance applications, however this has always required the use of a feedback device, such as a resolver or encoder. Optidrive P2 has been designed to operate with AC PM motors without requiring any feedback device, allowing them to be used for their energy efficiency benefits without incurring extra cost and complexity in applications which do not require position feedback.

Brushless DC Motors

BLDC motors are similar to AC PM motors, however the design requires a slightly different control method to optimise the performance. Optidrive P2 has the flexibility to control this type of motor, requiring only simple parameter changes. This provides much greater flexibility for OEMs, allowing Optidrive P2 to be used in a variety of applications, with various motor types.

Synchronous Reluctance Motors


Synchronous Reluctance Motors (SynRM), not to be confused with Switched Reluctance Motors, share a similar stator construction to standard induction motors, however the rotor is substantially different, in order to improve the overall efficiency of the motor. SynRM motors are ideally suited to variable torque applications.

Optidrive P2 can control synchronous reluctance motors, allowing the energy saving benefits to be realised.


At a Glance...

High performance, excellent usability and flexible to meet the needs of your application

Keyhole
Mounts for fast
installation



Integrated
Keypad & Display
(LED or Multi-language
Text Display)

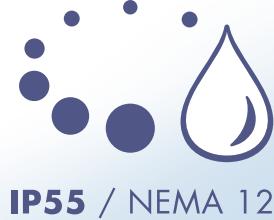

IP55 / NEMA 12

Integrated
EMC Filter



Pluggable Control
Terminals

Integrated Cable
Management



Integral
Brake
Transistor



High Quality
Long-life Fans



Safe Torque Off (provided as standard)	With	Without
<p>Optidrive P2 features a safe torque off function to allow simple integration into machine critical safety circuits.</p> <ul style="list-style-type: none"> Simple machine design reduces component costs, saves panel space and minimises installation time Faster shut down and reset procedures reduce system maintenance time Better safety standard compared to mechanical solution Better motor connection. Single cable with no interruption. 	<p>With</p>	<p>Without</p>

TÜV Rheinland Functional Safety Type Approved FS

Applications

High performance, accurate motor control for even the most demanding of applications



Mining & Quarrying

- Feed conveyers
- Crushers
- Cranes

Metals & Processing

- Grinding
- Cutting
- Polishing
- Drilling
- Rolling

Rubber & Plastics

- Extruders
- Moulding
- Mixers
- Winding

Food & Beverage

- Conveyers
- Pumps
- Mixers
- Palletisers

Powerful, versatile and
easy to use



Cranes

Requirements:

- High starting torque
- Smooth motor operation throughout starting and stopping phases
- Motor holding brake control
- Avoidance of load droop and sag
- Regeneration and braking capability during load lowering

Optidrive P2 provides:

- Dedicated Hoist Mode Operation with motor holding brake control algorithm
- Up to 200% torque from zero speed in vector operation without encoder feedback
- Multiple Preset Speed or variable speed operation
- Built in dynamic braking transistor, requires only an external resistor



Compressors

Requirements:

- Precise regulation of speed to ensure a consistent end product
- High starting torque demand in many applications
- Maximum efficiency under all conditions
- Safe operation to prevent accidents and injuries

Optidrive P2 Provides:

- PM Motor control mode to allows open loop operation with Permanent Magnet motors for maximum efficiency
- Maximum starting torque with standard AC motors
- Better than 0.5% speed holding accuracy in Open Loop Vector Operation
- Dedicated Safe Torque Off input complies with EN62061 SIL Level 2 for safe operation



Winding

Requirements:

- Precise control of motor torque over a broad speed range
- Accurate control of material tension under all conditions
- Open or closed loop control capability, based on tension feedback or winding diameter
- Web break protection in case of material breakage

Optidrive P2 Provides:

- PID Closed Loop Tension Control with feedback from a load cell or dancer arm
- Open Loop Vector control provides optimum control of the output torque level
- Encoder feedback option allows for a very wide speed range, even down to zero speed
- Safe Torque Off input immediately disables the drive in Emergency conditions


Options & Accessories

Installation options, plug-in modules and commissioning tools



Modbus RTU and CANopen
on board as standard

For additional communication
interfaces or functionality a
range of plug-in modules is
available:

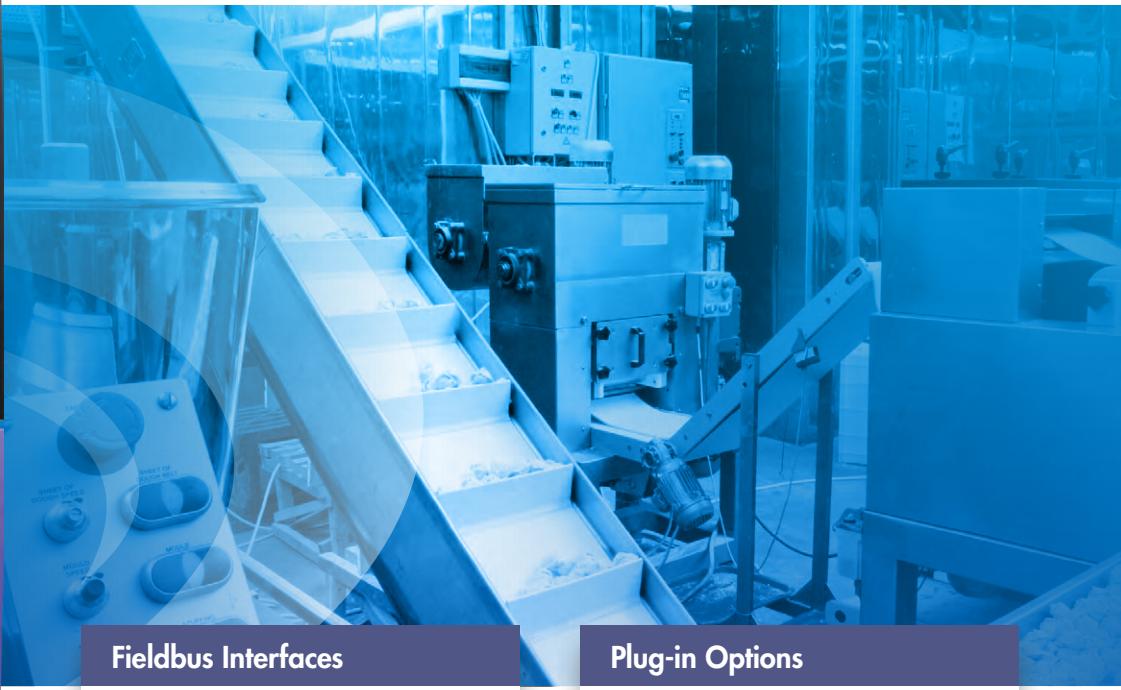

Fieldbus Interfaces



Profibus DP
OPT-2-PROFB-IN



DeviceNet
OPT-2-DEVNT-IN



Ethernet IP
OPT-2-ETHNT-IN



Modbus TCP
OPT-2-MODIP-IN



Profinet
OPT-2-PFNET-IN



EtherCat
OPT-2-ETCAT-IN



Plug-in Options



Encoder Feedback

OPT-2-ENCOD-IN (5 Volt)
OPT-2-ENCHT-IN (15 – 30 Volt)

Closed loop encoder feedback,
compatible with a wide range of
incremental encoders

Extended I/O

- OPT-2-EXTIO-IN
- Additional 3 Digital Inputs
 - Additional Relay Output

Extended Relay

OPT-2-CASCD-IN

Additional 3 Relay Outputs:

- Relay 3 – Drive Healthy Indication
Relay 4 – Drive Fault Indication
Relay 5 – Drive Running Indication

Functions are programmable / adjustable

Installation & Peripheral Options

A range of external EMC Filters, Brake Resistors, Input Chokes and Output Filters are available, to suit all installation requirements

Optistick Smart



NFC


Bluetooth®

Rapid Commissioning Tool

- Allows copying, backup and restore of drive parameters
- Provides Bluetooth interface to a PC running OptiTools Studio or the OptiTools Mobile app on a smartphone
- Onboard NFC (Near Field Communication) for rapid data transfer

OPT-3-STICK-IN

OptiTools Studio

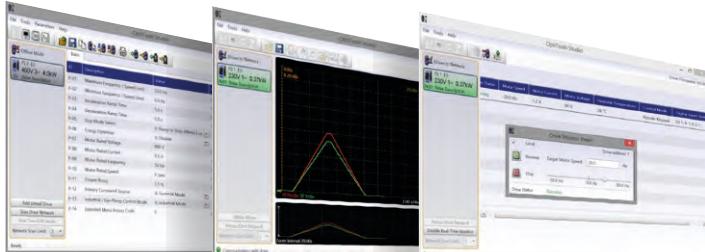

Powerful PC Software

Drive commissioning and parameter backup

- Real-time parameter editing
- Drive network communication
- Parameter upload, download and storage
- Simple PLC function programming
- Real-time scope function and data logging
- Real-time data monitoring

Compatible with:

Windows Vista
Windows 7
Windows 8
Windows 8.1
Windows 10


Drive Specification

Input Ratings		Supply Voltage	200 – 240V ± 10%
		380 – 480V ± 10%	9.6 – 115.2 kbps selectable
		500 – 600V ± 10%	8N1, 8N2, 8E1, 8O1
Supply Frequency		48 – 62Hz	PROFIBUS DP [DPV1]
Displacement Power Factor		> 0.98	PROFINET IO
Phase Imbalance		3% Maximum allowed	DeviceNet
Inrush Current		< rated current	EtherNet/IP
Power Cycles		120 per hour maximum, evenly spaced	EtherCAT
Output Ratings		460V 3Ph. Input: 1~350HP	Modbus TCP
		575V 3Ph. Input: 0.75~110kW (1~150HP)	
Output Power		230V 1Ph. Input: 0.75~2.2kW (1~3HP)	
		400V 3Ph. Input: 0.75~250kW	
Overload Capacity		150% for 60 seconds	
Output Frequency		0 – 500Hz, 0.1Hz resolution	
Acceleration Time		0.01 – 600 seconds	
Deceleration Time		0.01 – 600 seconds	
Typical Efficiency		> 98%	
Ambient Conditions		Temperature	Storage: -40 to 60°C Operating: -10 to 50°C
		Altitude	Up to 1000m ASL without derating Up to 2000m maximum UL Approved Up to 4000m maximum (non UL)
		Humidity	95% Max, non condensing Conforms to IEC 60068-2-6 Sinusoidal Vibration
		Vibration	10 - 57Hz @ 0.075mm Pk 57 - 150Hz @ 1g Pk
Enclosure		Ingress Protection	IP20, IP55, IP66
Programming		Keypad	Built-in keypad as standard Optional remote mountable keypad
		Display	Built-in multi language text display (IP55 & IP66) 7 Segment LED (IP20)
		PC	OptiTools Studio
Control Specification		Control Method	V/F Voltage Vector Energy Optimised V/F 3GV Sensorless Vector Speed Control 3GV Sensorless Vector Torque Control Closed Loop (Encoder) Speed Control Closed Loop (Encoder) Torque Control PM Vector Control BLDC Control Synchronous Reluctance
		PWM Frequency	4~32kHz Effective
		Stopping Mode	Ramp to Stop: User Adjustable 0.01~600 secs Coast to Stop
		Braking	Motor Flux Braking Built-in Braking Transistor
		Skip Frequency	Single point, user adjustable
		Setpoint Control	Analog Signal 0 to 10 Volts 10 to 0 Volts -10 to +10 Volts 0 to 20mA 20 to 0mA 4 to 20mA 20 to 4mA
		Digital	Motorised Potentiometer (Keypad) Modbus RTU CANopen


Fieldbus Connectivity		Builtin	CANopen	125 – 1000kbps		
Optional	Modbus RTU	9.6 – 115.2 kbps selectable	8N1, 8N2, 8E1, 8O1	PROFIBUS DP [DPV1] PROFINET IO DeviceNet EtherNet/IP EtherCAT		
		PROFIBUS DP [DPV1]				
I/O Specification				Other		
				Modbus TCP		
Power Supply	Power Supply	24 Volt DC, 100mA, Short Circuit Protected	10 Volt DC, 10mA for Potentiometer	5 Total as standard (Optional additional 3) 3 Digital (Optional additional 3) 2 Analog / Digital Selectable		
	Programmable Inputs	Opto - Isolated				
	Digital Inputs	8 – 30 Volt DC, internal or external supply				
	Analog Inputs	Response time < 4ms				
	PTC Input	Resolution: 12 bits				
	Programmable Outputs	Response time: < 4ms				
	Relay Outputs	Accuracy: < 1% full scale				
	Analog Outputs	Parameter adjustable scaling and offset				
Application Features		Motor PTC / Thermistor Input	Maximum Voltage: 250 VAC, 30 VDC Switching Current Capacity: 5A AC , 5A DC	Trip Level : 3kΩ		
		Standby / Sleep Mode				
Maintenance & Diagnostics		Boost Function				
		PID Control				
		Hoist Mode				
Standards Compliance		Internal PID Controller	Maintenance Indicator with user adjustable maintenance interval Onboard service life monitoring Hours Run Meter Resettable & Non Resettable kWh meters Cooling Fan Run Time	IP20 = 2 IP55 = N IP66 Non-switched = X IP66 Switched = Y		
		Multi Setpoint Select				
		Standby / Sleep Mode				
		Boost Function				
Fault Memory		Last 4 Trips stored with time stamp				
Data Logging		Logging of data prior to trip for diagnostic purposes:				
Maintenance Indicator		Output Current Drive Temperature DC Bus Voltage				
Monitoring		Maintenance Indicator with user adjustable maintenance interval				
Low Voltage Directive		Onboard service life monitoring				
EMC Directive		Hours Run Meter				
Additional Conformance		Resettable & Non Resettable kWh meters				
Marine Certification		Cooling Fan Run Time				
Environmental Conditions		Designed to meet IEC 60721-3-3, in operation: IP20 Drives: 3S2/3C2 IP55 & 66 Drives: 3S3/3C3				

Model Code Guide

ODP-2-22075-1KF4#-#N

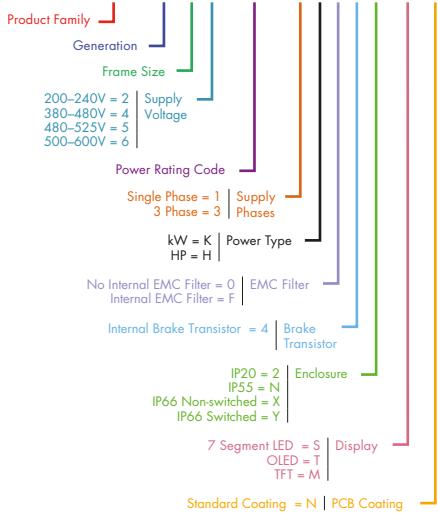

Connection Diagram

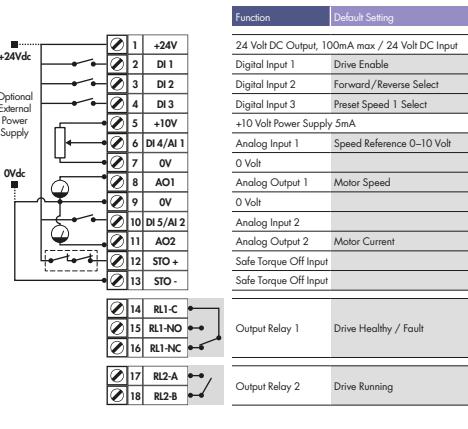

NOT TO SCALE



Size	IP20
mm Height	221
mm Width	110
mm Depth	185
kg Weight	1.8

IP66
2
3
4
5
6A
6B
8

IP55
2
3
4
5
6
7